



5-CHANNEL HEAVY DUTY


System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 1.0" outside dia.
- The "original" cable protector
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Hinged lid for easy cable placement
- Modular interlocking design



"Dog Bone" Connector

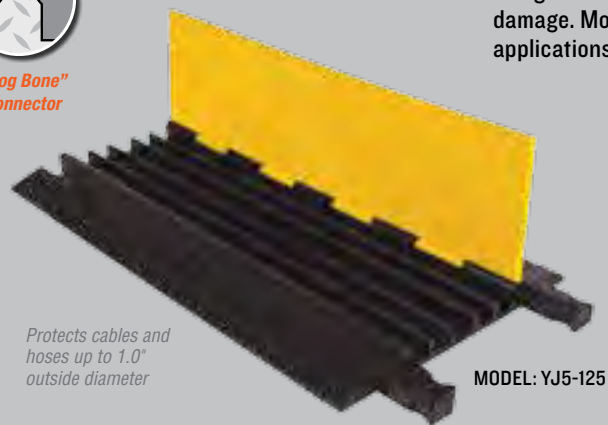

Protects cables and hoses up to 1.0" outside diameter

MODEL: YJ5-125



YELLOW JACKET® 5-CHANNEL CABLE PROTECTOR with hinged lid provides a safer crossing in high volume traffic areas while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in industrial, commercial, and public applications.

Lid/Base Color Options



LOAD CAPACITY

Max load tested at 70°F (21°C)
 16,300 lb./Tire (7,393 kg)
 32,600 lb./Axle (14,787 kg)




*NOTE: Center channel width is 1.65 in. (4.19 cm)

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ5-125	36 in. (91.4 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.375 in. (3.49 cm)	1 in. (2.54 cm)	28.2 lb. (12.8 kg)


ACCESSORIES for Yellow Jacket 5-Channel Heavy Duty Cable Protectors

45° LEFT TURN
MODEL: YJ5TL-125






Turns Color:
Y/B = Yellow Lid with Black Ramps

45° RIGHT TURN
MODEL: YJ5TR-125



Join left and right turns to create a jog


END CAPS (Pair Only)
MODEL: YJ5EB-125



*NOTE: Center channel width is 1.65 in. (4.19 cm)

End Caps Color: Y = Yellow

90° 4-WAY CROSS
MODEL: YJ5X-125
(Split or join cable runs)



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH*	E: CHANNEL HEIGHT	WEIGHT
45° LEFT TURN	YJ5TL-125	24 in. (61 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.325 in. (3.37 cm)	14.2 lb. (6.4 kg)
45° RIGHT TURN	YJ5TR-125	24 in. (61 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.325 in. (3.37 cm)	14.2 lb. (6.4 kg)
END CAPS (PAIR)	YJ5EB-125	Female: 7.375 in. (18.7 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.125 in. (2.86 cm)	4.05 lb. (1.8 kg)
		Male: 4.25 in. (10.8 cm)		1.875 in. (4.76 cm)			1.25 in. (3.18 cm)
90° 4-WAY CROSS	YJ5X-125	A= 28.5 in. (72.4 cm) A2= 24.5 in. (62.2 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	23.1 lb. (10.5 kg)

AMS[®] ACCESSIBILITY RAMPS for Yellow Jacket 5-Channel Heavy Duty Cable Protectors

CHECKERS 5-CHANNEL AMS[®] (Advanced Modular System) ACCESSIBILITY RAMPS feature a gradual slope and slip-resistant surface to ensure a safer crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' Accessibility Ramp system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA Compliant

Features patented design and "Hourglass" connector system (with adapter for Dog Bone connector system)


Channel height x width for AMS Center Section and Interconnect is 1.25 in. x 1.375 in.

Ramps: Yellow


Side Ramps: Blue

AMS and Interconnect:

Yellow lid with black base

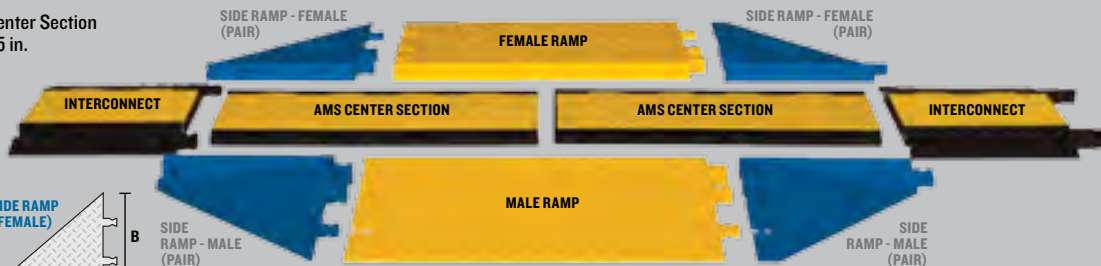

*NOTE: Interconnects can connect to Guard Dog or Yellow Jacket 5-Channel

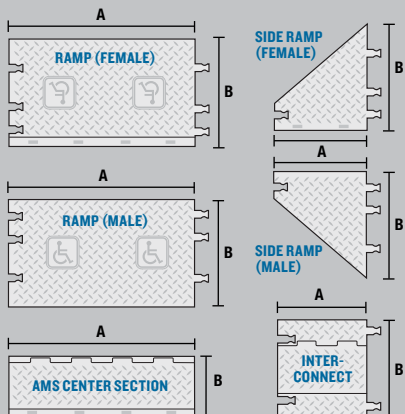

FEMALE RAMP
MALE RAMP
SIDE RAMPS - FEMALE (PAIR)
SIDE RAMPS - MALE (PAIR)
AMS CENTER SECTION
INTERCONNECT*

MODEL	A: LENGTH	B: WIDTH	HEIGHT	WEIGHT
WSA-125-RFAH-DY	36 in. (91.44 cm)	20.38 in. (51.75 cm)	1.875 in. (4.76 cm)	26 lb. (11.8 kg)
WSA-125-RMAH-DY	36 in. (91.44 cm)	20 in. (50.8 cm)	1.875 in. (4.76 cm)	24.85 lb. (11.3 kg)
WSA-125-BFF-BLU	17.75 in. (45.09 cm)	20.5 in. (52.07 cm)	1.875 in. (4.76 cm)	16.8 lb. (7.6 kg)
WSA-125-BFM-BLU	17.75 in. (45.09 cm)	20.5 in. (52.07 cm)	1.875 in. (4.76 cm)	18.9 lb. (8.6 kg)
YJ5-125-AMS-CTR	36 in. (91.44 cm)	11.75 in. (29.85 cm)	1.875 in. (4.76 cm)	16.7 lb. (7.6 kg)
YJ5I-125	17.88 in. (45.4 cm)	19.75 in. (50.17 cm)	1.875 in. (4.76 cm)	M: 16 lb. (7.3 kg) F: 15.6 lb. (7.1 kg)

U.S. Patent No: 7,592,547, U.S. Patent No: 7,385,139, U.S. Patent No: 7,309,836

AMS[®] ACCESSIBILITY RAMP KITS for Yellow Jacket 5-Channel Heavy Duty Cable Protectors



KIT 1

KIT 1 - includes:

- 2 Ramps
- 4 Blue Side Ramps
- 2 AMS Center Sections
- 2 Interconnects*

*NOTE: Interconnects can connect to Guard Dog or Yellow Jacket 5-Channel

LOAD CAPACITY

Max load tested at 70°F (21°C)

16,300 lb./Tire (7,393 kg)
32,600 lb./Axle (14,787 kg)

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT	
AMS KIT 1	WSA-125-KIT1-HS	111.13 in. (228.3 cm)	51.25 in. (130.2 cm)	1.875 in. (4.76 cm)	151.5 lb. (68.7 kg)



KIT 2

KIT 2 - includes:

- 2 Ramps
- 4 Blue Side Ramps
- 2 AMS Center Sections

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT	
AMS KIT 2	WSA-125-KIT2-HS	75.38 in. (191.5 cm)	51.25 in. (130.2 cm)	1.875 in. (4.76 cm)	101 lb. (45.8 kg)



KIT 3

KIT 3 - includes:

- 2 Ramps
- 1 AMS Center Section

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT	
AMS KIT 3	WSA-125-KIT3-HS	36 in. (91.44 cm)	51.25 in. (130.2 cm)	1.875 in. (4.76 cm)	67.5 lb. (30.6 kg)



5-CHANNEL HEAVY DUTY ADA/DDA

System features Dog Bone Connectors

- ## FEATURES
- Protects cables and hoses up to 1.325" outside dia.
 - ADA/DDA accessibility ramps built in
 - Interconnects directly to a Standard Ramp 5-Channel Yellow Jacket Cable Protector
 - Dog Bone Connectors to extend to any desired length
 - Reinforced hinged lid for easy cable placement



"Dog Bone" Connector



ADA/DDA Compliant

Protects cables and hoses up to 1.325" outside diameter

YELLOW JACKET® 5-CHANNEL ADA CABLE PROTECTOR has built-in ADA accessibility ramps to provide a safer crossing for vehicle and pedestrian traffic while protecting valuable electrical cables and hose lines. Because the ramps are built-in, there is no need for separate connectors.

Another unique feature of this product is that it interconnects directly to a 5-channel standard ramp Yellow Jacket cable protector. This modular interlocking design is available in lightweight 18" sections and it includes a recessed carrying handle on the underside of the protector. Ideal for use in amusement parks, entertainment venues, sporting events, and most public, commercial, industrial, construction, and utility applications.

Lid/Base Color Options - Specify after model number



Yellow/
Blue =
Y/BLU



Yellow/
Black =
Y/B





Black/
Black =
B/B

LOAD CAPACITY

Max load tested at 70°F (21°C)
10,500 lb./Tire (4,763 kg)
21,000 lb./Axle (9,526 kg)

MODEL: YJ5-125-ADA

Interconnects directly to a Standard Ramp 5-Channel Yellow Jacket Cable Protector!

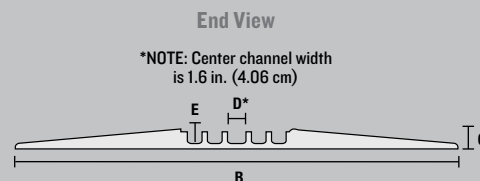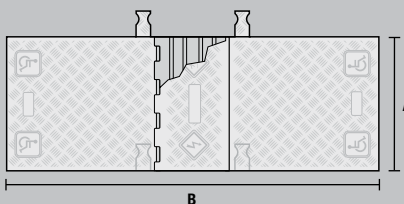

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ5-125-ADA	18 in. (45.7 cm)	50.0 in. (127.0 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	21 lb. (9.6 kg)



Guard Dogs in use at a outdoor concert venue



Yellow Jackets in use at a military operation



Linebacker Heavy Duty in use at a drilling rig



4-CHANNEL HEAVY DUTY


System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 1.25" outside dia.
- The "original" cable protector
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Hinged lid for easy cable placement
- Modular interlocking design



"Dog Bone" Connector

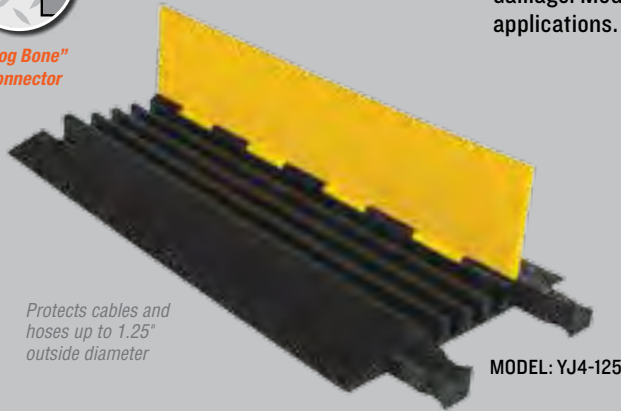

Protects cables and hoses up to 1.25" outside diameter

MODEL: YJ4-125

YELLOW JACKET® 4-CHANNEL CABLE PROTECTOR with hinged lid provides a safer crossing in high volume traffic areas while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in industrial, commercial, and public applications.

Lid/Base Color Options





Yellow/Black = Y/B

LOAD CAPACITY

Max load tested at 70°F (21°C)

16,300 lb./Tire (7,393 kg)
32,600 lb./Axle (14,787 kg)





MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ4-125	36 in. (91.4 cm)	17.5 in. (44.45 cm)	2 in. (5.08 cm)	1.25 in. (3.18 cm)	1.25 in. (3.18 cm)	23.5 lb. (10.7 kg)

ACCESSORIES for Yellow Jacket 4-Channel Heavy Duty Cable Protectors

END CAPS (Pair Only)

MODEL: YJ4EB-125



End Caps Color: Y = Yellow



Guard Dog Low Profiles in use at an outdoor event



Linebackers in use at a military training operation

END CAPS (PAIR)	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ4EB-125	Female:	7.25 in. (18.42 cm)	17.625 in. (44.77 cm)	2 in. (5.08 cm)	1.25 in. (3.18 cm)	1.25 in. (3.18 cm)	3.8 lb. (1.7 kg)
	Male:	4.25 in. (10.8 cm)	17.625 in. (44.77 cm)	2 in. (5.08 cm)	1.25 in. (3.18 cm)	1.25 in. (3.18 cm)	3 lb. (1.4 kg)



3-CHANNEL HEAVY DUTY

System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 2.125" outside dia.
- The "original" cable protector
- Available with Standard or Wide ramps
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Modular interlocking design



"Dog Bone" Connector



Protects cables and hoses up to 2.125" outside diameter

MODEL: YJ3-225

YELLOW JACKET® 3-CHANNEL CABLE PROTECTORS are available with either standard or wide ramps. The wide ramp models have longer ramps that make it easier for vehicles to cross over.

Both of these models have a hinged lid and they provide a safer crossing in high volume traffic areas while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in industrial, commercial, and public applications.

Lid/Base Color Options



Yellow/Black = Y/B


LOAD CAPACITY

Max load tested at 70°F (21°C)



14,210 lb./Tire (6,446 kg)
28,420 lb./Axle (12,892 kg)

Available with either Standard or Wide Ramps!

End View - Standard Model




End View - Wide Model




MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ3-225	36 in. (91.4 cm)	18.5 in. (50.8 cm)	2.875 in. (7.3 cm)	2.125 in. (5.4 cm)	2.125 in. (5.4 cm)	34.15 lb. (15.5 kg)
YJ3-225W	34.75 in. (88.3 cm)	26.75 in. (67.9 cm)	3.25 in. (8.3 cm)	2.125 in. (5.4 cm)	2.125 in. (5.4 cm)	62.9 lb. (28.5 kg)

ACCESSORIES for Yellow Jacket 3-Channel Heavy Duty Cable Protectors




45° LEFT TURN
MODEL: YJ3TL-225



45° RIGHT TURN
MODEL: YJ3TR-225



END CAPS (Pair Only)
MODEL: YJ3EB-225

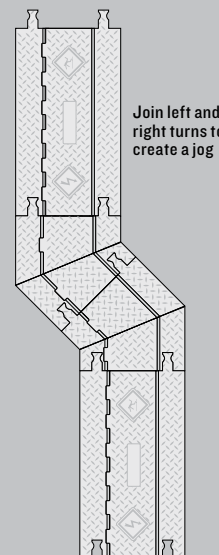

Join left and right turns to create a jog

Turns Color: Y/B = Yellow Lid with Black Ramps

End Caps Color: Y = Yellow

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
45° LEFT TURN	YJ3TL-225	23.5 in. (59.69 cm)	18.75 in. (47.63 cm)	2.875 in. (7.3 cm)	2.125 in. (5.4 cm)	2.125 in. (5.4 cm)	19 lb. (8.6 kg)
45° RIGHT TURN	YJ3TR-225	23.5 in. (59.69 cm)	18.75 in. (47.63 cm)	2.875 in. (7.3 cm)	2.125 in. (5.4 cm)	2.125 in. (5.4 cm)	18.8 lb. (8.5 kg)
END CAPS (PAIR)	YJ3EB-225	Female: 8.25 in. (20.96 cm)	18.625 in. (50.17 cm)	3 in. (7.62 cm)	2.125 in. (5.4 cm)	2.125 in. (5.4 cm)	6.2 lb. (2.8 kg)
		Male: 8.375 in. (21.27 cm)		3 in. (7.62 cm)			8.2 lb. (3.7 kg)

AMS® ACCESSIBILITY RAMPS for Yellow Jacket 3-Channel Heavy Duty Cable Protectors



CHECKERS 3-CHANNEL AMS® (Advanced Modular System) ACCESSIBILITY RAMPS feature a gradual slope and slip-resistant surface to ensure a safer crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' Accessibility Ramp system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA Compliant

Features patented design and "Hourglass" connector system (with adapter for Dog Bone connector system)

Channel height x width for 3-Channel AMS
Center Section is 2.25 in. x 2.25 in.
Ramps: Yellow
Side Ramps: Blue
AMS: Yellow Lid with Black Base

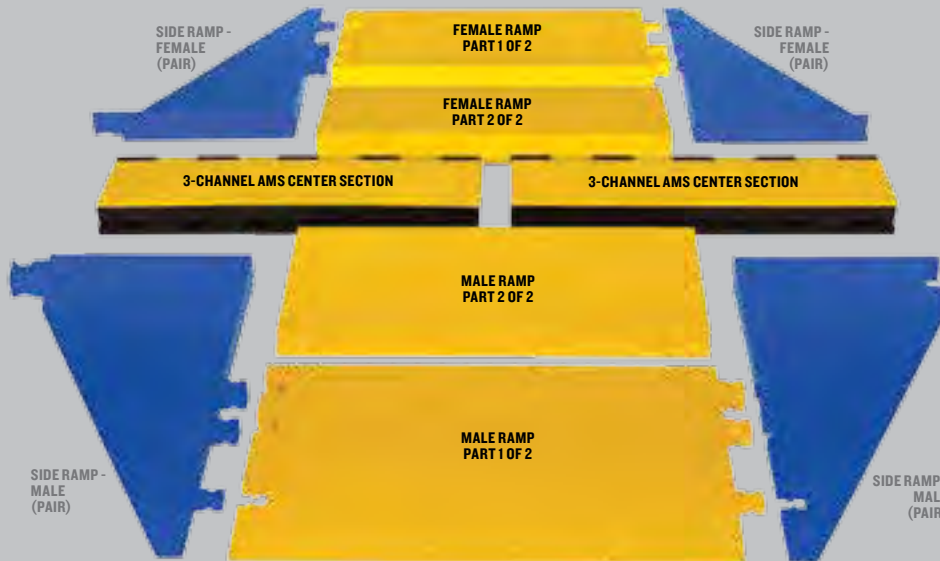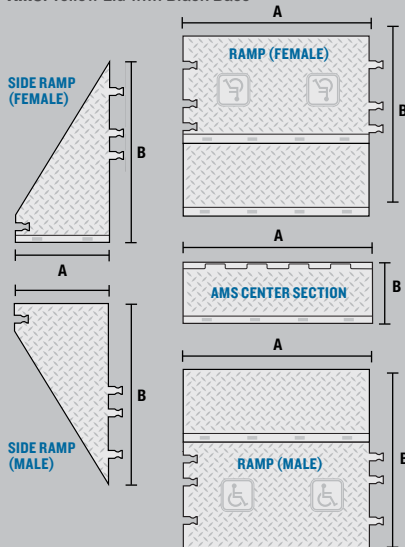

U.S. Patent No: 7,592,547, U.S. Patent No: 7,385,139, U.S. Patent No: 7,309,836

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT
FEMALE RAMP	WSA-225-RFAH-DY	36 in. (91.44 cm)	33.25 in. (84.46 cm)	3 in. (7.62 cm)	90.1 lb. (40.9 kg)
MALE RAMP	WSA-225-RMAH-DY	36 in. (91.44 cm)	33.375 in. (84.77 cm)	3 in. (7.62 cm)	90.1 lb. (40.9 kg)
SIDE RAMPS - FEMALE (PAIR)	WSA-225-BFF-BLU	17.75 in. (45.09 cm)	35.5 in. (90.17 cm)	3 in. (7.62 cm)	17.2 lb. (7.8 kg) (EACH)
SIDE RAMPS - MALE (PAIR)	WSA-225-BFM-BLU	17.75 in. (45.09 cm)	35.5 in. (90.17 cm)	3 in. (7.62 cm)	18.4 lb. (8.3 kg) (EACH)
3-CHANNEL AMS CENTER SECTION	YJ3-225-AMS-CTR	36 in. (91.44 mm)	9.87 in. (25.07 cm)	3 in. (7.62 cm)	19.5 lb. (8.8 kg)

AMS® ACCESSIBILITY RAMP KITS for Yellow Jacket 3-Channel Heavy Duty Cable Protectors



AMS KIT 1

LOAD CAPACITY

Max load tested at 70°F (21°C)


14,210 lb./Tire (6,446 kg)
28,420 lb./Axle (12,892 kg)

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
WSA-225-KIT1-HS	71.25 in. (180.98 cm)	77.875 in. (197.8 cm)	3 in. (7.62 cm)	290.4 lb. (131.7 kg)

KIT 1

KIT 1 - includes:

- 2 Ramps
- 4 Blue Side Ramps
- 2 AMS Center Sections



AMS KIT 2

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
WSA-225-KIT2-HS	36 in. (91.44 cm)	77.875 in. (197.8 cm)	3 in. (7.62 cm)	199.7 lb. (90.6 kg)

KIT 2

KIT 2 - includes:

- 2 Ramps
- 1 AMS Center Section



HEAVY DUTY 3.75" CHANNEL


System features Dog Bone Connectors

- ## FEATURES
- Protects cables and hoses up to 3.75" outside dia.
 - The "original" cable protector
 - Dog Bone Connectors to extend to any desired length
 - Thick lid and base allow for high volume of traffic
 - Hinged lid for easy cable placement
 - Modular interlocking design

YELLOW JACKET HEAVY DUTY 5-CHANNEL - 3.75 INCH



"Dog Bone" Connector

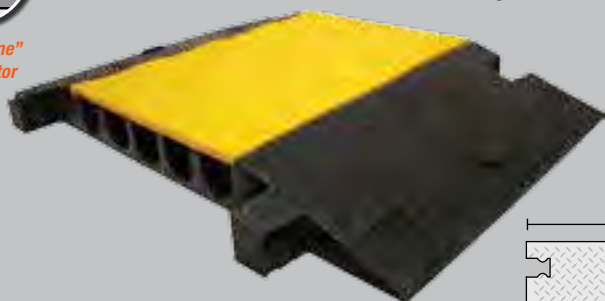


Protects cables and hoses up to 3.75" outside diameter


MODEL: YJ5-400

YELLOW JACKET® 5-CHANNEL CABLE PROTECTOR with hinged lid provides a safer crossing in high volume traffic areas while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in industrial and heavy duty applications.

Lid/Base Color Options



LOAD CAPACITY
Max load tested at 70°F (21°C)
7,990 lb./Tire (3,624 kg)
15,980 lb./Axle (7,248 kg)

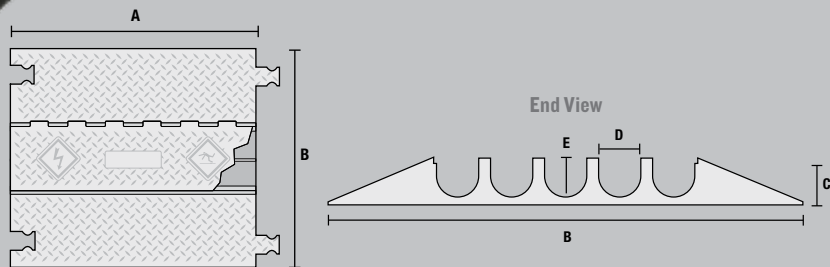

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ5-400	35.75 in. (90.8 cm)	57.25 in. (145.4 cm)	5.125 in. (14.9 cm)	3.875 in. (9.84 cm)	3.75 in. (9.53 cm)	200 lb. (90.72 kg)



Yellow Jackets in use at the Naval Academy graduation



Guard Dogs in use at Silverston Speedway



Linebackers in use at a US Army camp



1-CHANNEL HEAVY DUTY

System features Dog Bone Connectors

FEATURES


- Protects cables and hoses up to 5.0" outside dia.
- The "original" cable protector
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Hinged lid for easy cable placement
- Modular interlocking design

YELLOW JACKET® 1-CHANNEL CABLE PROTECTORS with hinged lid protect valuable large electrical cables and hose lines from damage while providing a safer crossing in high volume traffic areas. Modular interlocking design is ideal for extremely heavy duty industrial areas.

YELLOW JACKET HEAVY DUTY 1-CHANNEL - 3 INCH



"Dog Bone" Connector

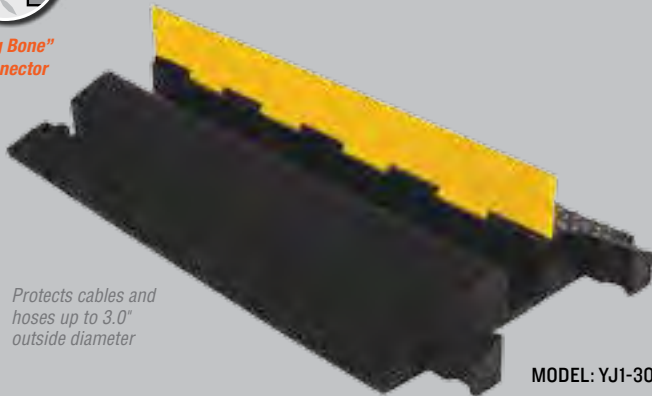

Protects cables and hoses up to 3.0" outside diameter

MODEL: YJ1-300

Lid/Base Color Options





LOAD CAPACITY

Max load tested at 70°F (21°C)

7,990 lb./Tire (3,624 kg)

15,980 lb./Axle (7,248 kg)




MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ1-300	36 in. (91.44 cm)	20.625 in. (52.39 cm)	3.875 in. (9.84 cm)	3.0 in. (7.62 cm)	3.0 in. (7.62 cm)	42.6 lb. (19.3 kg)

YELLOW JACKET HEAVY DUTY 1-CHANNEL - 5 INCH



"Dog Bone" Connector

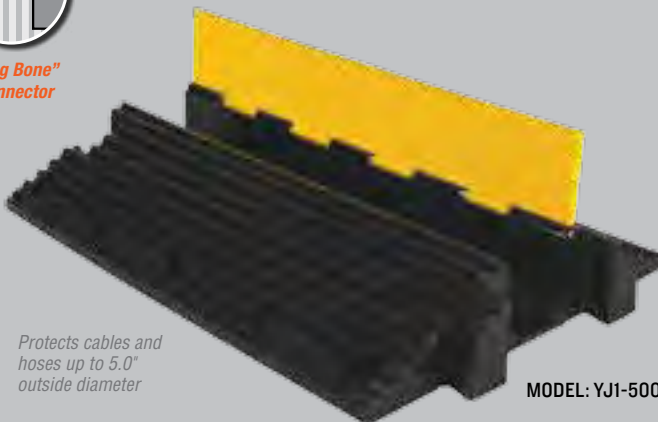

Protects cables and hoses up to 5.0" outside diameter

MODEL: YJ1-500

Lid/Base Color Options





LOAD CAPACITY

Max load tested at 70°F (21°C)

9,435 lb./Tire (4,259 kg)

18,870 lb./Axle (8,518 kg)



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ1-500	36 in. (91.44 cm)	26.75 in. (67.95 cm)	5.875 in. (14.92 cm)	5 in. (12.7 cm)	5 in. (12.7 cm)	92 lb. (41.7 kg)



HEAVY DUTY AMS SYSTEMS

System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 2.25" outside dia.
- Connect unlimited center sections and add ramps
- Dog Bone Connectors to extend to any desired length
- 5 or 3-Channel Systems available
- Hinged lid for easy cable placement
- Patented technology with modular interlocking design

YELLOW JACKET HEAVY DUTY 5-CHANNEL AMS® SYSTEM

The YELLOW JACKET® 5-CHANNEL AMS® (Advanced Modular System) is patented technology that utilizes separate cable protector sections and ramps to create a system that is fully expandable to hold an unlimited number of cables. By detaching the ramps, you can also quickly add cable runs and ADA compatible side ramps to existing systems. The Yellow Jacket AMS readily handles heavy truck and bus traffic while providing easy access for pedestrians, carts and wheelchairs. Hinged lids make for easy loading of cables and hoses.



"Dog Bone" Connector



Protects cables and hoses up to 1.25" outside diameter

Lid/Base Color Options



Yellow/Black = Y/B


LOAD CAPACITY

Max load tested at 70°F (21°C)


16,300 lb./Tire (7,393 kg)
32,600 lb./Axle (14,787 kg)

"System" includes 1 AMS Center Section and 1 pair of Ramps

AMS CENTER SECTION - YJ5-125-AMS-CTR

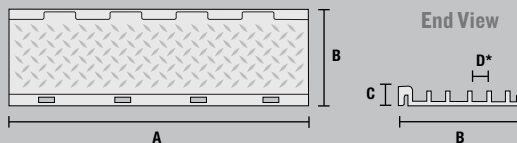

AMS RAMPS - YJ5-125-AMS-F-B / YJ5-125-AMS-M-B

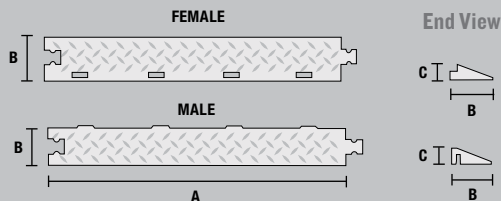


*NOTE: Center channel width is 1.65 in. (4.19 cm)

"System" includes 1 AMS Center Section and 1 pair of Ramps

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH*	E: CHANNEL HEIGHT	WEIGHT
AMS SYSTEM	YJ5-125-AMS	36 in. (91.44 cm)	19.75 in. (50.17 cm)	2 in. (5.08 cm)	1.375 in. (3.49 cm)	1.25 in. (3.18 cm)	29.35 lb. (13.3 kg)
AMS CENTER SECTION	YJ5-125-AMS-CTR	36 in. (91.44 cm)	11.75 in. (29.85 cm)	1.875 in. (4.76 cm)	1.375 in. (3.49 cm)	1.25 in. (3.18 cm)	16.65 lb. (7.6 kg)
AMS RAMP FEMALE	YJ5-125-AMS-F-B	36 in. (91.44 cm)	5.125 in. (13.02 cm)	2 in. (5.08 cm)	N/A	N/A	7.35 lb. (3.3 kg)
AMS RAMP MALE	YJ5-125-AMS-M-B	36 in. (91.44 cm)	5 in. (12.7 cm)	2 in. (5.08 cm)	N/A	N/A	5.35 lb. (2.4 kg)

U.S. Patent No: 7,309,836

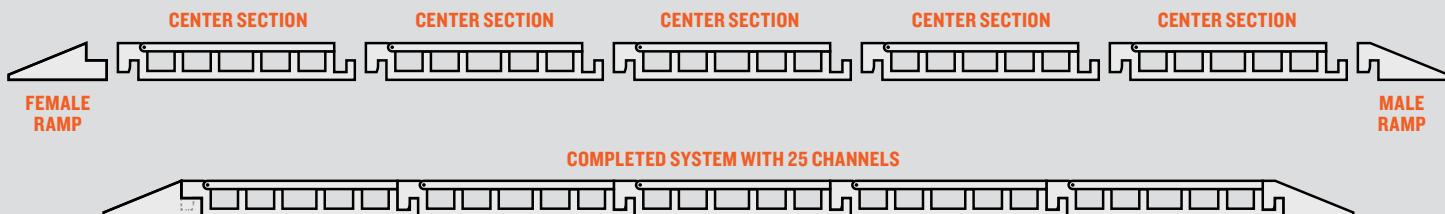


YELLOW JACKET HEAVY DUTY 3-CHANNEL AMS[®] SYSTEM



"Dog Bone" Connector

The YELLOW JACKET[®] 3-CHANNEL AMS[®] (Advanced Modular System) is patented technology that utilizes separate cable protector sections and ramps to create a system that is fully expandable to hold an unlimited number of cables. By detaching the ramps, you can also quickly add cable runs and ADA compatible side ramps to existing systems. The Yellow Jacket AMS readily handles heavy truck and bus traffic while providing easy access for pedestrians, carts and wheelchairs. Hinged lids make for easy loading of cables and hoses.

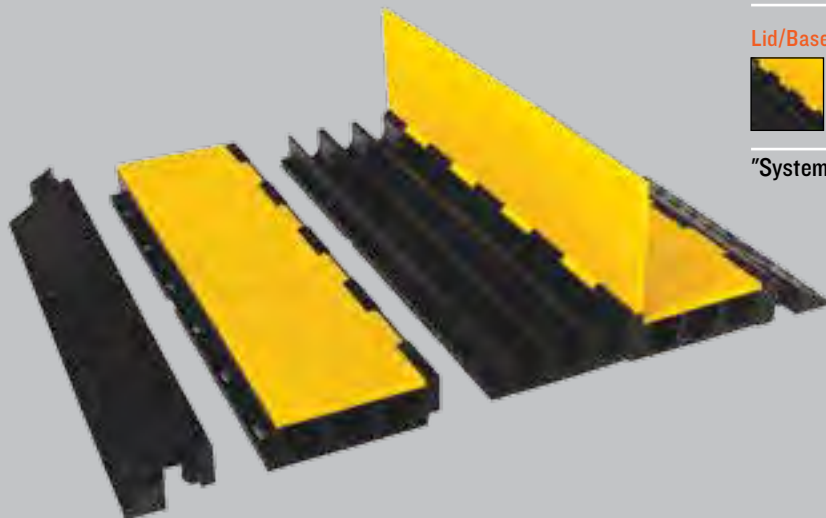

Protects cables and hoses up to 2.25" outside diameter

Lid/Base Color Options




LOAD CAPACITY


Max load tested at 70°F (21°C)
 14,210 lb./Tire (6,446 kg)
 28,420 lb./Axle (12,892 kg)

"System" includes 1 AMS Center Section and 1 pair of Ramps

AMS CENTER SECTION - YJ3-225-AMS-CTR

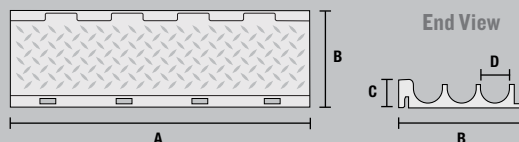

AMS RAMPS - YJ3-225-AMS-F-B / YJ3-225-AMS-M-B

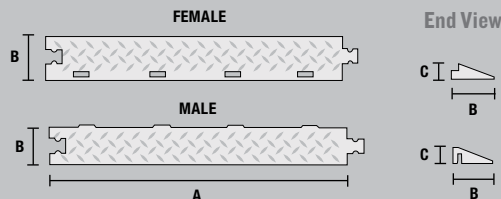

"System" includes 1 AMS Center Section and 1 pair of Ramps

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	
AMS SYSTEM	YJ3-225-AMS	36 in. (91.44 cm)	18.61 in. (47.27 cm)	3 in. (7.62 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	39 lb. (17.7 kg)
AMS CENTER SECTION	YJ3-225-AMS-CTR	36 in. (91.44 cm)	9.87 in. (25.07 cm)	3 in. (7.62 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	19.5 lb. (8.8 kg)
AMS RAMP FEMALE	YJ3-225-AMS-F-B	36 in. (91.44 cm)	5.5 in. (13.97 cm)	3 in. (7.62 cm)	N/A	N/A	10.1 lb. (4.6 kg)
AMS RAMP MALE	YJ3-225-AMS-M-B	36 in. (91.44 cm)	4.7 in. (11.96 cm)	3 in. (7.62 cm)	N/A	N/A	9.4 lb. (4.3 kg)

U.S. Patent No: 7,309,836



AMS system used on public sidewalks



AMS in use at Naval dock yard